

CONSTRUCTION

The William Garvey Standard Bath is constructed from a laminated teak composite. The single version has one removable backrest. The double version has two. The bath is designed to stand on two solid teak bearers which elevate the bath by 100mm (4").

The bath has a shaped base to improve drainage, but it should be levelled as accurately as possible. The bearers have adjustable feet to make levelling easier.

Large, non-standard baths require additional base supports which are supplied.

PLUMBING CONNECTIONS

Geo Baths are fitted with a standard 1 1/2" chrome Presflo (chainless) waste compatible with standard shallow bath traps. A standard plastic shallow 'P' trap is supplied fitted for 1 1/2" waste plumbing. The waste is fitted in the centre of the bath.

Overflows are not fitted as standard. If you require an overflow, the bath can be customised to conceal overflow plumbing.

Generally, taps are either wall or floor mounted, but baths can be customised to enable taps to be integrated.


HOT WATER SUPPLY

With greater cubic capacity, our baths use more hot water than conventional baths. A combi or geyser type boiler will provide a continuous flow of hot water whereas the capacity of a conventional system is limited by the size of the storage tank. Typically a combi type boiler is able to deliver 15.1 litres (4 US gallons) per minute at 35 degrees centigrade.


CARE & MAINTENANCE

All William Garvey kitchen and bathroom products are polished with Timberfect, a resin based sealant which sinks into the timber and fuses with it, forming an exceptionally tough layer which will not absorb stains and which is easy to clean using ordinary non-abrasive bathroom and kitchen cleaners. Abrasive cleaners and products containing bleach should be avoided as they may lighten the timber unevenly. However, limescale removers can be used without the risk of damage.


*GEO BATHS CAN BE MADE TO INDIVIDUAL SIZES.....
PLEASE CONTACT US TO DISCUSS YOUR REQUIREMENTS*

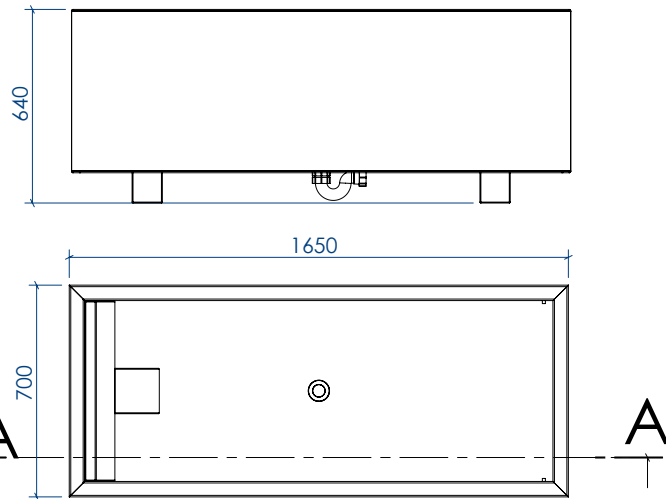

GEO STANDARD SINGLE

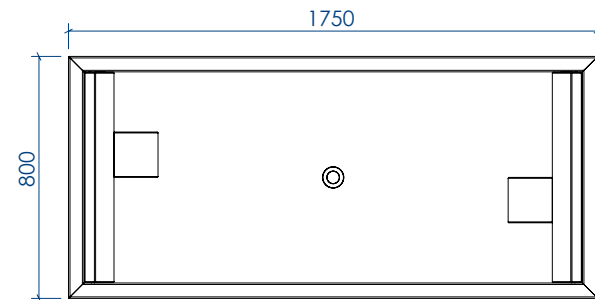

GEO STANDARD DOUBLE

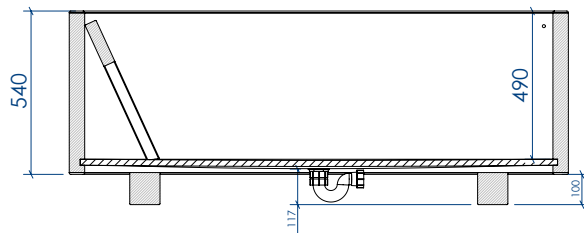

SECTION A-A
SCALE 1 : 25



DIMENSIONS	GEO STANDARD SINGLE		GEO STANDARD DOUBLE	
	mm	in	mm	in
length	1650mm	65"	1750mm	69"
width	700mm	27.5"	800mm	31.5"
height (excl. bearers)	540mm	21.5"	540mm	21.5"
internal length	1550mm	61"	1650mm	65"
internal width	600mm	23.5"	700mm	27.5"
internal depth	490mm	19.5"	490mm	19.5"
wall thickness	50mm	2"	50mm	2"
weight (empty)	94 kg	207 lbs	120 kg	264 lbs
weight filled	549 kg	1208 lbs	686 kg	1509 lbs
cubic capacity	455 litres	100 gall	566 litres	125 gall
capacity 400mm deep	372 litres	82 gall	462 litres	102 gall
crated size	188x93x68cm	74x37x26"	198x103x68cm	78x40x26"

GEO STANDARD BATH DATA SHEET

ISSUE 3 December 2006

All rights reserved. Copyright William Garvey Ltd



WILLIAM GARVEY LTD

Leyhill Payhembury Honiton Devon EX14 3JG
tel: 0044 (0)1404 841430 fax 01404 841626

www.williamgarvey.co.uk