

HELIO BATH DATA SHEET

CONSTRUCTION

The Helio Bath is constructed and turned from solid teak with a base made from a teak laminated composite.

PLUMBING CONNECTIONS

Helio Baths are fitted with a standard 1 1/2" PREFLO (chainless) waste compatible with standard bath traps.


HOT WATER SUPPLY

A combi or geyser type boiler will provide a continuous supply of hot water, whereas in a conventional system, the amount of hot water available is limited by the size of the storage tank. Typically, a combi type boiler is able to deliver about 15 litres (4 US gallons) per minute at 35 degrees centigrade. At this flow rate (hot supply only), a Helio bath would take approx. 15 mins to fill to a depth of 250mm (10")

CARE & MAINTENANCE

Helio Baths are polished with Timberect Plus. This is an epoxy resin sealant which sinks into the timber and fuses with it, forming an exceptionally tough layer which will not absorb stains and which is straightforward to clean with standard non-abrasive bathroom and kitchen cleaners. Products containing bleach should be avoided as they may lighten the timber unevenly. Further information on care and maintenance is provided with the bath.

Triple-C Products

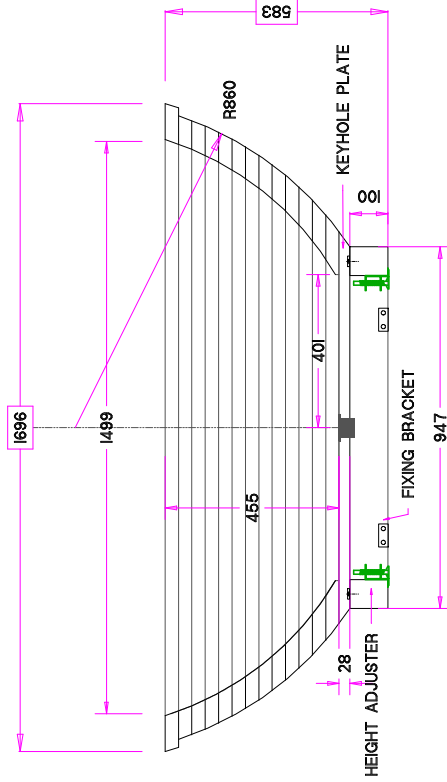

SECTION THROUGH BATH NTS

NOTE

KEYHOLE PLATES CAN BE USED AS DEMOUNTABLE FIXINGS BETWEEN BATH AND PLINTH TO ENABLE PLINTH TO BE ANCHORED TO FLOOR

KEY DIMENSIONS	
Diameter	1696mm 67"
Height	583mm 23"
Internal height	455mm 18"
Volume	552 litres 146 US gall
Shipping weight (approx)	390kg 858lbs
Weight (full of water)	720 kg 1584 lbs

OUR BATHS CAN BE MADE TO INDIVIDUAL SIZES  
PLEASE CONTACT US TO DISCUSS YOUR REQUIREMENTS